


SERIES 19 2" Diameter, 15 Amp


FEATURES

- UL Recognized
- Rugged Construction
- Choice of Termination







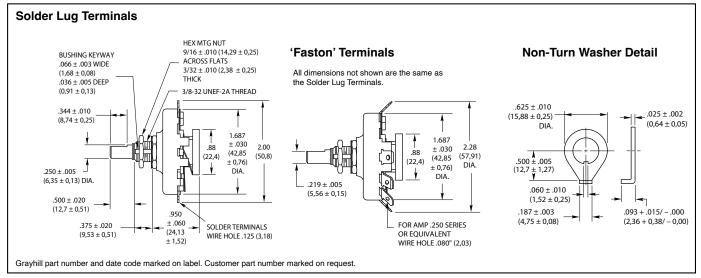

SPECIFICATIONS

Electrical Rating

Rated: UL Recognition: File Number E35289 15 Amps, 120 Vac, non-inductive load. One Amp, 120 Vdc, non-inductive load.

Additional Grayhill Rating: 7.5 Amps, 220 Vac, non-inductive load.

This rating is based on the following criteria: Overload —50 operations at 125% rated ac load and 150% rated DC load.

Endurance—6000 operations at rated load with 900 Vac dielectric strength before and after test. Temperature Rise—Not to exceed 30°C when carrying rated ac load after endurance test.

Contacts will carry 20 Amps at 115 volts AC with 30°C maximum temperature rise.

Contact Resistance: (Measured at 2 Vdc and approximately 100 mA) for new switch approximately 10 milliohms.

Insulation Resistance: Approximately 100,000 Mohms. Between mutually insulated parts. **Voltage Breakdown:** Approximately 2500 Vac between mutually insulated parts.

Materials and Finishes

Rotor Contact: Silver alloy Stator Contact: Silver alloy Shaft: 303 Stainless steel Stop Rivet: Steel, tin/zinc-plated Mounting Bushing: Brass, tin/zinc-pl

Mounting Bushing: Brass, tin/zinc-plated Base and Drive Hub: Heat resistant, electrical

grade phenolic.

Mounting Nut: Brass, tin/zinc-plated or stainless

Detent Mechanism: Brass, silver-plated "Faston" Terminal: Brass, silver-plated Solder Terminal: Brass, silver-plated

Mounting Hardware: One mounting nut 9/16" across flats, 3/32" thick and one non-turn washer (see detail) are supplied with each switch.

Additional Characteristics


Single Pole, Single Deck: 2 to 11 positions plus common 30° Indexing.

Contacts: Non-shorting type


Stops: A rivet provides the fixed stop on all switches. Minimum number of positions is 2, and maximum is 11. Terminal 12, the common, is isolated from rotation.

Rotational Torque: 12 to 36 ounchinches on average for new switches. Contact Force: Approximately 12 ounces Shaft Flat Orientation: Opposite point of contact (see circuit diagram).

Circuit Diagram viewed from shaft end with switch in position #1



Recommended Panel Cut-Out for Series 19



ACCESSORIES

Non-Turn Washer

Brass, tin/zinc-plated washer, detailed above may be purchased as a separate item. Part No. 19C1014.

ORDERING INFORMATION

Part Numbers: Designate as follows, using the 2 digits after the dash to indicate the number of positions.

For Faston Terminal:

Use 19101-02UL through 19101-11UL

For Solder Terminal:

Use 19001-02UL through 19001-11UL

Specials: Not available through Distributors. For special shafts, bushings, etc. contact Grayhill.

Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.